

VTM-TLM43DP-4K | VTM-TLM55DP-4K

Transcendent 43" & 55" 4K Professional Security LED Monitors with HDMI, and Display Port




KEY FEATURES


- 43" or 55" TFT-LED Display with 16:9 Aspect Ratio
- Resolution up to 3840 × 2160 (8MP / 4K)
- HDMI Inputs (× 3), and Display Port (DP)
- Picture-in-Picture (PIP) and Multi-Input Display Support
- Integrated Stereo Speakers (2 × 10W)
- Ultra-Slim Bezel Design with 178° Wide Viewing Angle
- 3D Comb Filter and De-interlacing Support for Clear, Stable Images
- NDAA Compliant and Built for Demanding Security Environments
- VESA Standard Mounting Compatible (200x100mm)
- Industrial Power Supply Included
- Professional Grade Security Monitors Designed for 24/7 Continuous Use with 50,000+ Hour Panel Life
- 3-Year Warranty



REAR CONNECTIONS

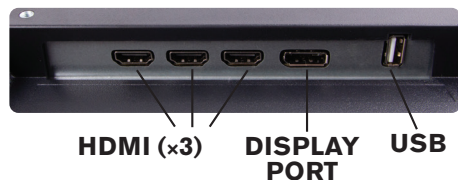

DIMENSIONS

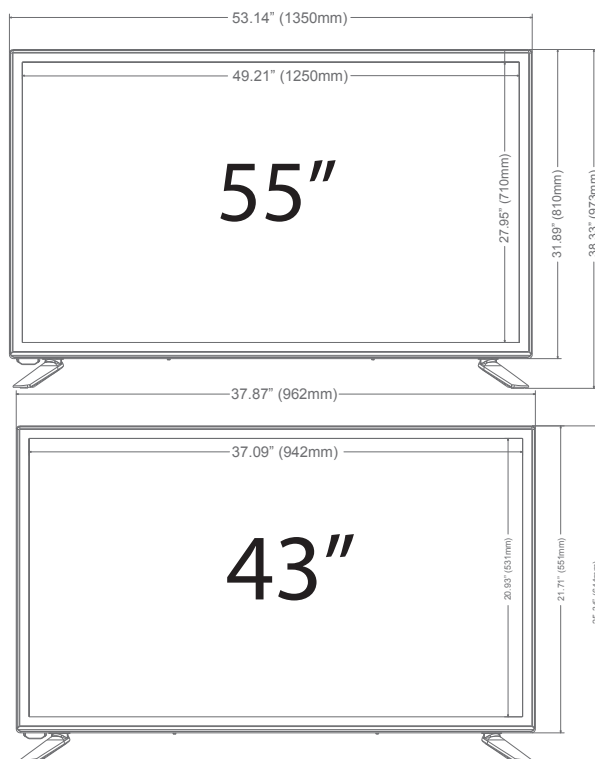

A PROFESSIONAL SECURITY MONITOR BUILT FOR DEMANDING 24/7 SURVEILLANCE ENVIRONMENTS

The VITEK Transcendent Series "DP" 4K Professional Security Monitors deliver crystal-clear Ultra HD performance with industrial-grade reliability. Available in 43" and 55" models, both feature a slim-bezel design, wide 178° viewing angle, and a long-life LED panel rated for 50,000+ hours of continuous use. Designed for mission-critical security applications, these NDAA-compliant monitors include multiple HDMI, and Display Port, integrated stereo speakers, and VESA mounting options for flexible installations. Complete your security system with monitors engineered to match the quality and performance of VITEK's professional video solutions.

VTM-TLM43DP-4K | VTM-TLM55DP-4K



SPECIFICATIONS	VTM-TLM43DP-4K	VTM-TLM55DP-4K
Screen Size / Type	43" TFT LED Backlit	55" TFT LED Backlit
Active Display Area	37.05" (W) × 20.83" (H)	47.6" (W) × 26.79" (H)
Resolution	3840 × 2160 (4K UHD)	
Aspect Ratio	16:9	
Display Color	1.073G	
Pixel Pitch (mm)	0.294(H) × 0.294(V)	0.315(H) × 0.315(V)
Brightness (nits)	350 cd/m ²	450 cd/m ²
Contrast Ratio	1000:1	4000:1
Viewing Angle	178°(H) / 178°(V)	
Response Time	5ms	
Inputs	3 × HDMI (2.0) , 1 × DP (Display Port), 1 × USB, 1 × PWR	
Speaker	2 × 3W (Stereo)	
Color System	PAL / NTSC / SECAM	
OSD Control	Auto adjust, Brightness, Contrast, H/V Position, Clock, Phase, Color, Language	
Additional Features	Picture in Picture (PiP) Display, Anti-static, Anti-Magnetic Field, Anti-Interference, No Radiation	
3D Comb Filter	Yes	
Video Noise Reduction	Yes	
Power Supply	AC100V–240V, 50/60Hz	
Power Consumption	40W	50W
Mounting	Stand mount, VESA mount	
VESA Mount Standard	100 × 200mm	
Rated Usage - Lifespan	50,000+ Hours of 24/7 Continuous Use	
OSD Languages	English, Spanish, French, German, Italian, Dutch, Russian, Chinese	
Accessories Included	Industrial PSU, Screw, Cable Holder, Quick Start Guide	
Working Temperature	-22°F ~ 185°F (-30°~+85°C)	
Dimensions (W x H x D)	37.87" × 21.71" × 3.64" (without stand) 37.87" × 25.34" × 7.50" (with stand)	53.15" × 31.89" × 3.64" (without stand) 53.15" × 38.33" × 7.50" (with stand)